



StormMaster® Shake

Timeless Beauty with Superior Protection

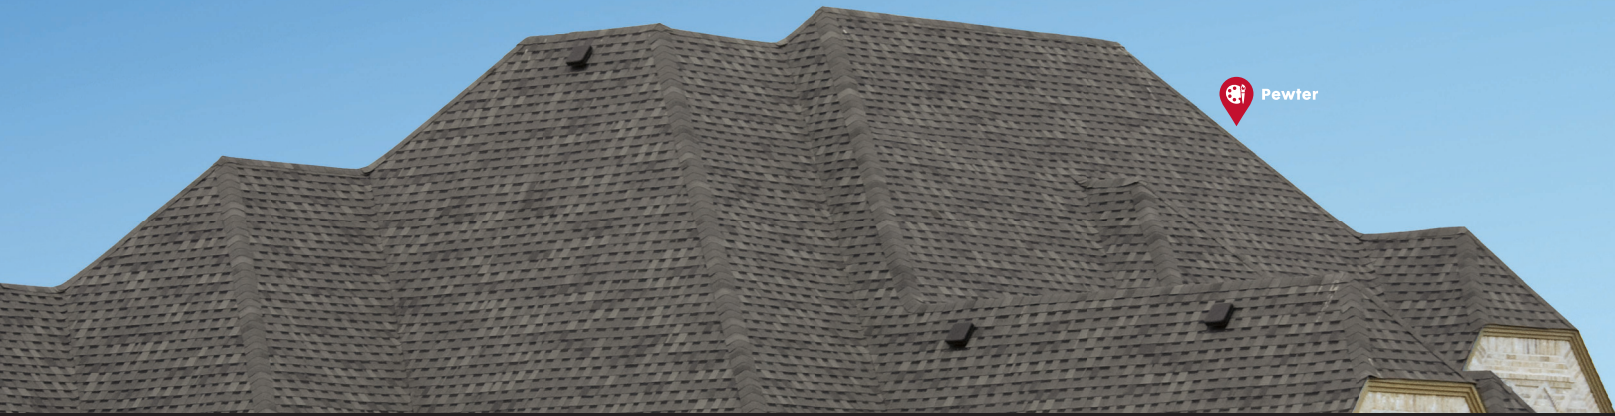

Beauty Backed By Protection. StormMaster® Shake shingles featuring Scotchgard™ Protector offer durability and architectural style for a timeless look with protection against black streaks caused by algae, they are also backed by the Atlas Lifetime* Algae Resistance Limited Warranty.

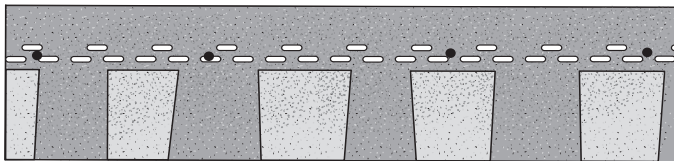

Length: 42" / 1066.8 mm
Width: 14" / 355.6 mm

Exposure: 6" / 152.4 mm
Shingles Per Bundle: 18-20

FEATURES

Available In 10 Colors
Scotchgard™ Protector
Up To 150 mph Wind Limited Warranty**
FASTAC® Double Sealant Lines
Manufactured Using Core4 Enhanced Polymer Technology
Class 4 Impact Resistance - UL 2218
Atlas Lifetime* Algae Resistance Limited Warranty
Lifetime Limited Warranty**
Atlas Signature Select® Eligible¹

ASTM

D7158, Class H Wind Resistance, Passed at 150 mph
D6381, Uplift Resistance
D3018, Type 1
D3161, Class F, Tested at 110 mph
D3462, As Manufactured
E108, Class A Fire Resistance

UL

2218, Class 4 Impact Resistance
790, Class A Fire Resistance
2390, Class H Wind Resistance

CODES AND COMPLIANCES

Meets AC438 Criteria
CAN/CSA-A123.5-M90
Florida Building Code Approved – FL 16305
Miami-Dade County Product Control Approved



For maximum protection and warranty coverage, install an Atlas Signature Select® Roofing System with components designed and backed by an Atlas warranty.

SAFETY, STORAGE AND HANDLING

WARNING: Roofing application can be dangerous. Observe all precautions and safety guidelines in accordance with proper roofing trade practices. Minimize roof traffic. Perform regular roof maintenance in appropriate weather.

IMPORTANT PRECAUTIONS: Store on flat surface. Protect from weather during storage and on job site. Sealant protection tape is placed on back of each shingle and does not have to be removed before applying.

For additional safety, storage and handling instructions go to: AtlasRoofing.com/roof-shingles/sds

INSTALLATION AND SPECIFICATIONS

For warranty installation instructions go to: AtlasRoofing.com/roof-shingles/stormmaster-shake-shingles

For detailed installation and complete 3-part specifications go to: AtlasRoofing.com/roof-shingles/specifications

Atlas Roofing Corporation (ATLAS) warrants to you, the original owner of its shingle products, that this product is free from any manufacturing defects that materially affect the performance of your shingle during the Premium Protection Period or that cause leaks for the balance of the applicable warranty period.

* In order to qualify for the Atlas Lifetime Algae Resistance Limited Warranty against black streaks caused by blue-green algae, installation must include Atlas StormMaster® Hip & Ridge shingles featuring Scotchgard™ Protector or Atlas Pro-Cut® High Profile Hip & Ridge shingles featuring Scotchgard™ Protector with Atlas shingles featuring Scotchgard™ Protector.

** Refer to the Atlas Roofing Limited Shingle Warranty for all coverage requirements. The 150 mph wind provision requires Atlas Pro-Cut Starter Shingles installed on all the eaves & rakes and Atlas StormMaster® Hip & Ridge/Atlas Pro-Cut® High Profile Hip & Ridge. Additional Limitations apply.

¹ Refer to the Atlas Signature Select® Limited Warranty for all system coverage requirements. Scotchgard™ and the Scotchgard™ Protector logo, including the plaid design and 3M™ logo, are all trademarks of 3M™.



AtlasRoofing.com #AtlasProtects


© Copyright 2023, Atlas Roofing Corporation ATL-225969-01 5/23

VENTILATION REQUIREMENTS

Inadequate ventilation of attic areas can cause a buildup of moisture and heat. These conditions can cause:

1. Accelerated roof weathering
2. Deck rot and attic fungus
3. Shingle distortion due to deck movement
4. Blisters

Install roof vents at ridges and eaves. FHA requires one square foot (0.1 sq. m) of free ventilation to each 150 square feet (13.9 sq. m) of attic area or one square foot (0.1 sq. m)/300 square feet (28 sq. m) if 50% ventilation is provided near the ridge. For more information visit www.atlasroofing.com.



PREVENT BLOW OFF

DURING COLD WEATHER AND SEVERE WIND, HAND SEALING IS REQUIRED USING TAB CEMENT MEETING ASTM D-4586. CAN/CSA-A 123.5-M90 requires shingles applied in Canada between September 1 and April 30 be adhered with a field applied adhesive as outlined by manufacturer. The tab cement used on these shingles will seal them to the course below in a matter of days using the heat of the sun. Sealing time may increase when applied in winter below 55°F, depending upon the climate and geographic location. Dust accumulation may also delay sealing.

Note: Do not remove the tape on the back of the shingle. It is there to protect the shingle sealant and contains important coded information.

Colors



Black Shadow




Pewter



Hearthstone



Silver Stone



Chestnut



Highland Brown



Majestic Shake



Weathered Wood



Copper Canyon



Morning Harvest



LIFETIME
limited warranty

Comprehensive warranty coverage for black streaks caused by algae, damage from high winds and manufacturer defects.



UP TO
150MPH
wind resistance

Beauty meets protection with the help of the Atlas 150 mph Wind Limited Warranty**.



Scotchgard™
shingle protector

Maintain your roof's appearance for years by resisting the black streaks caused by algae.



HP42®
technology

These bigger 42" shingles mean a faster install, quicker clean up and less waste - plus big savings on materials and labor.



CORE4®
enhanced polymer technology

Shingles with Core4® are stronger and longer-lasting than other shingles boasting the industry's highest wind and Impact ratings.



To provide homeowners the most accurate representation of color options, several photo scans and house shots were utilized in various lighting conditions. Variations in lighting illustrate the color gradients on asphalt shingle roofs.

Color blends vary from shingle to shingle. Before installation, consult with your contractor and request to view the actual shingles being installed on your roof to ensure confidence in your final color selection.